

# 1500 Twin Units Switches and Indicators 16A 250Vac

rocker switches



ART1500AB01N00AB01NLBC000

- ▶ Twin unit rocker switch
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Single pole switches
- ▶ Splash resistant option
- ▶ Panel cut out 'A' style: 27.2 x 22.3mm



16(4)A 250Vac T125



UL CSA 16A 250Vac  
 UL CSA (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp  
 UL 85°C, file E45221, CSA file LR10990

In house test


Inrush 36A to EN61058-1

For versions with High Inrush or for 50,000 operations, see page 20.




RoHS compliant

3mm contact gap except where marked  $\mu$ .  
 Technical data on pages 4 & 5 (switches), 6 (indicators).

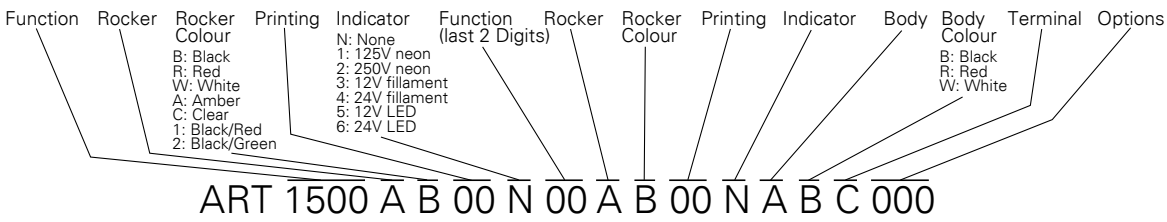

TERMINAL	FUNCTION	ROCKER
<b>C</b>  6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4 	<b>A</b> Softline (Matt) 
<b>H</b>  4.8 x 0.8	<b>1500</b> ON - OFF 	<b>B</b> Softline splash resistant (Matt) 
<b>K</b>  2.8 x 0.8	<b>1510 <math>\mu</math></b> HP rating N/A ON - ON 	<b>W</b> Curved splash resistant (Matt) 
<b>T</b>  Solder	<b>1520 <math>\mu</math></b> 125V & 250V 1/2 HP H terminal rated T100 only ON - OFF - ON 	<b>X</b> Two colour (Matt) (not momentary) ON - OFF only 
<b>X</b>  PCB 0.8Sq	<b>1530</b> X terminal N/A Indicator Technical data on page 6  	<b>A</b> Softline lens (Matt) (Indicator) 

### Splash Resistant

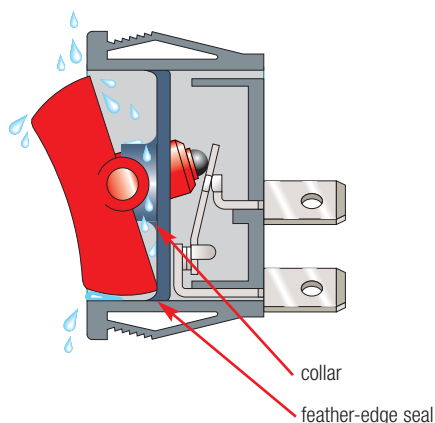


### 1500 W and B splash resistant options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytel collar/seals for enhanced protection.

BODY	OPTIONS
<p><b>A</b> Panel cut-outs</p> <p>Gloss or Matt</p>	<p><b>Finish</b> Matt is standard.</p> <p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> Call sales for custom legends. State if a legend is to appear on the left or right hand unit (viewed from the front).</p> <p><b>Lamp voltage</b> Call sales for details.</p>
<p><b>B</b></p> <p>Matt only</p>	
<p><b>L</b></p> <p>Matt only</p>	
<p><b>Q</b></p> <p>Gloss or matt</p>	
<p><b>R</b></p> <p>Matt only</p>	
<p><b>T</b></p> <p>Matt only</p>	
<p>For all options call sales.</p>	
<p>Cut-outs must be punched in the direction of insertion</p>	

### DIMENSIONS (mm)




Call sales for terminal spacing details

### Panel thickness

<b>A,Q</b>	0.75 to 3.3mm
<b>L,B,T</b>	0.75 to 2.5mm
<b>R</b>	0.75 to 3.0mm

### Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double pole body.

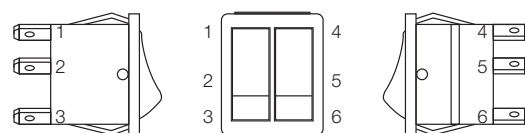

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly. (This has terminal numbers 1, 2 & 3)

### Examples of printing (code)

